


LED投射灯

水星



可选配件 | OPTIONAL

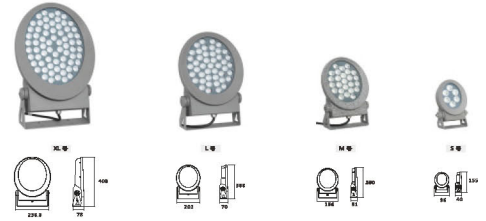

名称：防坠落绳
材质：φ16多股软钢丝绳
用途：高空安装时的防坠安全装置

详细参数 | DETAILED PARAMETERS

规格	产品型号	额定功率	光源数量	输入电压	控制方式	灰阶	角度区间	光通量	光源种类
单色常亮	TGSX-S-7W	7W	1.3W*9PCS	AC220V	OFF/ON	—	15°-60°	595LM	SMD3030
	TGSX-S-13W	13W	1.3W*9PCS	AC220V	OFF/ON	—	15°-60°	1040LM	SMD3030
	TGSX-M-18W	18W	1.3W*25PCS	AC220V	OFF/ON	—	6°-60°	1710LM	SMD3030
	TGSX-M-24W	24W	1.3W*25PCS	AC220V	OFF/ON	—	6°-60°	2208LM	SMD3030
	TGSX-M-28W	28W	1.3W*25PCS	AC220V	OFF/ON	—	6°-60°	2520LM	SMD3030
	TGSX-M-32W	32W	1.3W*25PCS	AC220V	OFF/ON	—	6°-60°	2816LM	SMD3030
	TGSX-L-38W	38W	1.3W*45PCS	AC220V	OFF/ON	—	6°-60°	3610LM	SMD3030
	TGSX-L-45W	45W	1.3W*45PCS	AC220V	OFF/ON	—	6°-60°	4095LM	SMD3030
	TGSX-L-50W	50W	1.3W*45PCS	AC220V	OFF/ON	—	6°-60°	4500LM	SMD3030
	TGSX-L-54W	54W	1.3W*45PCS	AC220V	OFF/ON	—	6°-60°	4752LM	SMD3030
	TGSX-XL-66W	66W	1.3W*70PCS	AC220V	OFF/ON	—	6°-60°	6270LM	SMD3030
TGSX-XL-76W	76W	1.3W*70PCS	AC220V	OFF/ON	—	6°-60°	6840LM	SMD3030	
TGSX-XL-90W	90W	1.3W*70PCS	AC220V	OFF/ON	—	6°-60°	7920LM	SMD3030	
单色外控	TGSX-S-D12W	12W	1.3W*9PCS	DC24V	DMX512	65536	15°-60°	960LM	SMD3030
	TGSX-M-D24W	24W	1.3W*18PCS	DC24V	DMX512	65536	6°-60°	1920LM	SMD3030
	TGSX-L-D36W	36W	1.3W*45PCS	DC24V	DMX512	65536	6°-60°	3060LM	SMD3030
	TGSX-L-D54W	54W	1.3W*45PCS	DC24V	DMX512	65536	6°-60°	4320LM	SMD3030
	TGSX-XL-D72W	72W	1.3W*54PCS	DC24V	DMX512	65536	6°-60°	5760LM	SMD3030
RGB外控	TGSX-S-RGB18W	18W	3W*6PCS	DC24V	DMX512	65536	15°-60°	—	SMD3535 3in1
	TGSX-M-RGB36W	36W	3W*18PCS	DC24V	DMX512	65536	15°-60°	—	SMD3535 3in1
	TGSX-L-RGB72W	72W	3W*36PCS	DC24V	DMX512	65536	15°-60°	—	SMD3535 3in1
	TGSX-XL-RGB108W	108W	3W*54PCS	DC24V	DMX512	65536	15°-60°	—	SMD3535 3in1
RGBW外控	TGSX-S-RGBW27W	18W+6W	4W*6PCS	DC24V	DMX512	65536	15°-60°	—	SMD3535 4in1
	TGSX-M-RGBW54W	36W+18W	4W*18PCS	DC24V	DMX512	65536	15°-60°	—	SMD3535 4in1
	TGSX-L-RGBW108W	72W+36W	4W*36PCS	DC24V	DMX512	65536	15°-60°	—	SMD3535 4in1
	TGSX-XL-RGBW160W	108W+54W	4W*54PCS	DC24V	DMX512	65536	15°-60°	—	SMD3535 4in1

备注：①光通量基于4000K色温 ②以上角度全指半角

