

SF series

AC
220-240V

CRI ≥ 80


RoHS



PF ≥ 0.9

SDCM
< 6

ERP

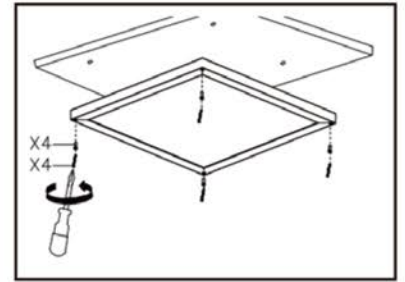

Benefits

- Surface mount installed with screws, quite easy and save labor cost.
- Plenty of spaces for wire to connect with push pole terminal.

Item No.	Voltage	Wattage	Lumen	Efficiency	CRI	PF	Dimmable	CCT(K)	Driver	Material	Dimension	UGR
PLE02-2235-840	220~240V	35W	4200LM	120LM/W	80	>0.9	NO	4000K	Built-in	AL+PS	595X595X34mm	UGR<25
PLE02-2235-840U	220~240V	35W	3675LM	105LM/W	80	>0.9	NO	4000K	Built-in	AL+PS	595X595X34mm	UGR<19
PLE02-2242-840	220~240V	42W	5040LM	120LM/W	80	>0.9	NO	4000K	Built-in	AL+PS	595X595X34mm	UGR<25
PLE02-2242-840U	220~240V	42W	4410LM	105LM/W	80	>0.9	NO	4000K	Built-in	AL+PS	595X595X34mm	UGR<19
PLE02-1435-840	220~240V	35W	4200LM	120LM/W	80	>0.9	NO	4000K	Built-in	AL+PS	295X1195X34mm	UGR<25
PLE02-1435-840U	220~240V	35W	3675LM	105LM/W	80	>0.9	NO	4000K	Built-in	AL+PS	295X1195X34mm	UGR<19
PLE02-1442-840	220~240V	42W	5040LM	120LM/W	80	>0.9	NO	4000K	Built-in	AL+PS	295X1195X34mm	UGR<25
PLE02-1442-840U	220~240V	42W	4410LM	105LM/W	80	>0.9	NO	4000K	Built-in	AL+PS	295X1195X34mm	UGR<19

